




Digital Signage Applications

- Public Display
 - Retail stores, Museums, Restaurants & Sports bars
 - Markets, Government
- Corporate Display
 - Financial Services, Hotels, Production Line




Specifications

		SyncMaster 711ND
Client	Operating System	Win CE
	CPU	AMD Geode GX 466
	Memory (Flash / RAM)	128 MB / 128 MB
	Embedded Application	MS Internet Explorer, File explorer, WMP, Image Viewer JAVA, Flash, MS Office Viewer MagicNet, MS RDP
	Networking Protocol	(Remote Desktop Protocol)
	Network	TCP/IP with DNS/DHCP (10/100Mbps)
	USB	4 downstream (2 rear / 2 left) USB 2.0
Management Program	MagicNet SD	
Compatible Server OS	Client Management Windows 2000/XP Windows Server 2000 Windows Server 2003 (2000/XP are not compatible for RDP activation)	
LCD display	Type	17" a-si TFT/TN
	Pixel Pitch (mm)	0.264
	Brightness	300 cd/m ²
	Contrast Ratio	600: 1
	Viewing Angle	160° / 160°
	Response Time (ms)	8
	Interface	Analog
	Maximum Resolution	1280x1024
	Color Supported	16.2 Mil.
	Special Features	MagicBright, MagicColor Digital Display Director
Monitor Function	Input Video Signal	Analog RGB
	Sync. Type	Separate, Composite
	Input Connectors	15 pin D-sub
	Screen Control S/W	MagicTune
	Signal Output	Analog RGB (1280x1024, 1024x768)
Power	Consumption	40W (typical), 2W @Off mode
	Regulation	Energy Star
Dimension	Set(WxHxD) mm (with stand)	370.0x404.0x200.0
	Set(WxHxD) mm (w/o stand)	370.0x316.0x60.3
	Packing(WxHxD) mm	455x437x141
Weight	Net (Kg)	5.8
	Gross (Kg)	8
Wall-Mount	VESA 100mm	
Cabinet Color (front / back)	Dark silver/Black, Black/Black	
Regulation	TCO 99	

LCDM6901CA01H0AWW

Dimensions

711ND / unit: mm

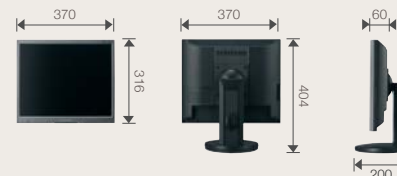

Design and Specifications are subject to change without notice.

www.samsung-monitor.com

Distributed by:



imagine streamlined connectivity

Complete Digital Signage is easy to control while reducing costs and space constraints. Simple installation and maintenance, SyncMaster 711ND is the modern solution to your IT needs.





Networking Possibilities in Digital Signage Solution

SyncMaster 711ND provides the solution for convenient network connectivity. Complete Digital Signage functions save costs and provide convenient installation and maintenance. SyncMaster 711ND guarantees successful innovation for your IT solutions.



Complete and convenient connectivity

Digital Signage

Fully integrated solution for the provision of multimedia content in order to promote, inform, and entertain specific targeted audiences.

DIGITAL SIGNAGE SYSTEMS are a network of digital signs, which can be controlled remotely using a central server.

MagicNet^{SD}



Easy and User-friendly contents scheduling program


- Content schedule and monitor control from host through the network
 - Delivers advertisement and information via digital network
 - Controls each monitor function without peripheral device
 - Sends instant messages to each monitor
- Embedded MS Internet Explorer
- Thin Client mode



Server



Client

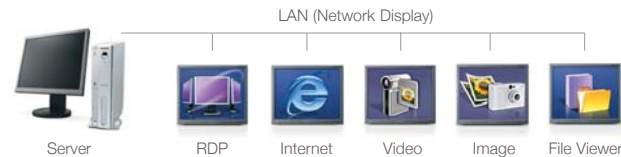

Versatile Contents

- Video : MPEG 1/2/4, DivX 4/5, WMV9
- Image : JPEG, BMP
- File Viewer : MS-Word, Powerpoint, Excel, PDF, HTML

MagicColor



MagicColor Engine realizes rich and clear colors and best picture quality, bringing nature itself onto your screen.

- Intelligent Mode (Skin Tone Protection)
- Full Mode (Full Color Enhancement)



Hue and saturation of all colors can be optimized to provide vivid pictures. In intelligent mode, skin tone can be excluded since each user may have specific preferences.



Including skin tone, the hue and saturation of entire screen can be enhanced to show clear and lively colors.

MagicBright



MagicBright finds the best viewing configuration for you, based on the images being shown. Four viewing modes of text, Internet, movie and custom are provided. Each mode defines brightness, gamma and contrast.



Text Mode : Word, Spread Sheet



Internet Mode : Browsing Internet



Movie

Applications

Public / Corporate Display

